

Manhole Cover For Liquid Tanks



www.solimarpneumatics.com

Fast, Easy and Safe Operation



Crude Oil

Asphalt

Water

**Other – non-code
liquid applications**

Meets Industry Standards

- ✓ DOT 407 Compliant
- ✓ Working pressure of 25 psig (MAWP), test pressure of 45 psig

What Sets Us Apart From the Rest

- ✓ Single pivoting ball handle quickly opens and closes the cover.
- ✓ Extremely Low Profile - 4.25" from vessel centerline top on transverse mounted assembly
- ✓ Lightweight cast aluminum cover is easy to step on and over - **No protruding clamping lugs to trip on**
- ✓ Leak Free - Self-sealing, hollow gasket allows for distortion in collar for tight fit. Easy to install, remove, clean and replace - **No glue needed**

Solimar Pneumatics


Minneapolis, MN 55432 USA

1 800 233.7109

Tel: 763 574.1820 / Fax: 763 574.1822

e-mail: solimar@solimarpne.com

Manhole Cover for Liquid Tanks

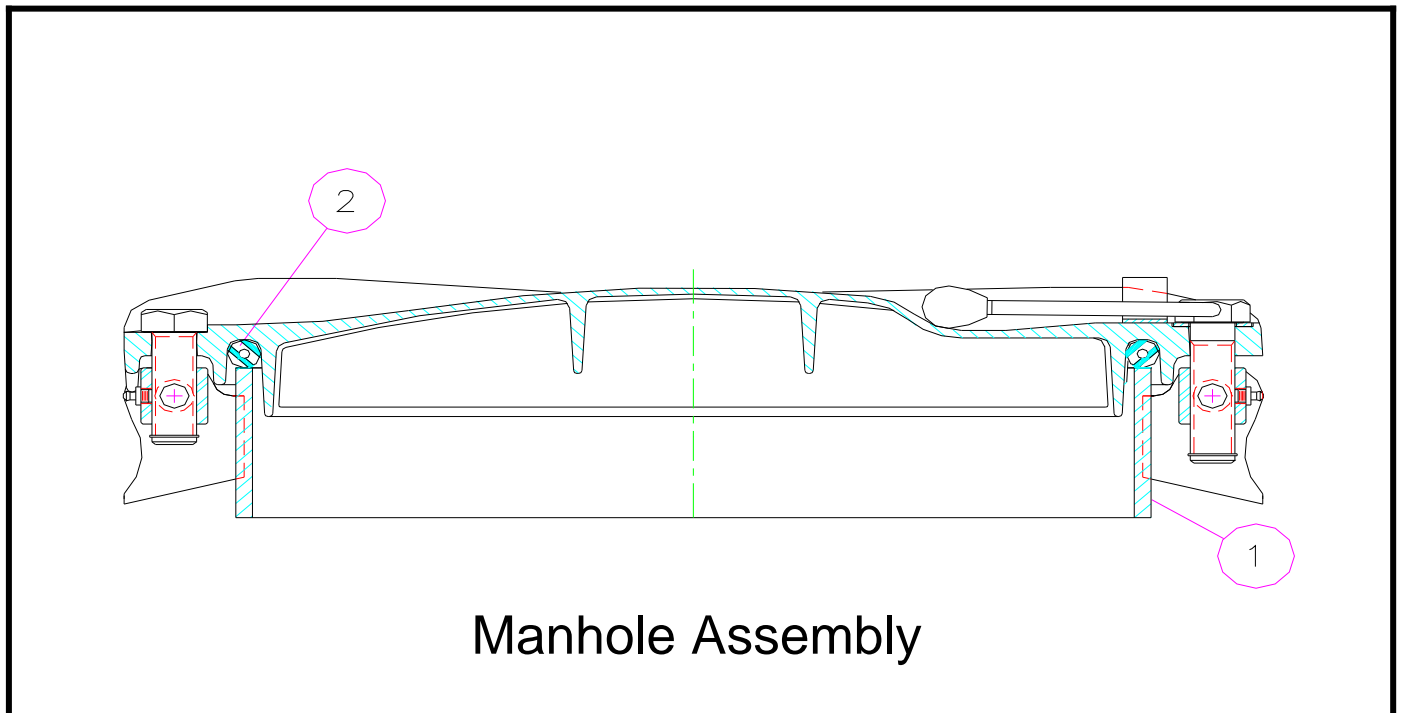

Assembly	Collar Selection (1)	Gasket Material (2)
39	0 3/8" x 4" Aluminum, Transverse Mounting 1 3/8" x 5" Aluminum, Longitudinal Mounting 2 1/4" x 4" Steel, Transverse Mounting 3 1/4" x 5" Steel, Longitudinal Mounting 4 1/4" x 4" SS, Transverse Mounting 5 1/4" x 5" SS, Longitudinal Mounting	0 SBR (black) 1 Neoprene, Oil Resistant (black) 2 EPDM (white) 3 Viton, High Temperature (black)

Selection Example: Assembly desired is 3/8" x 5" Aluminum collar with a viton gasket

39 + 1 (3/8" x 5" Alum) + 3 (Viton) = Assembly #3913

Proven Performance. The Solimar Manhole Cover has been used as original equipment by leading manufacturers world-wide as well as for retrofitting existing tanks. The Solimar Manhole Cover is not interchangeable for reliability and durability with any other cover. Accept no substitute, specify Solimar.

08/08



1 800 233.7109

Tel: 763 574.1820 / Fax: 763 574.1822

e-mail: solimar@solimarpne.com